


Information sheet

Reckmann Boomvangs HVG.II

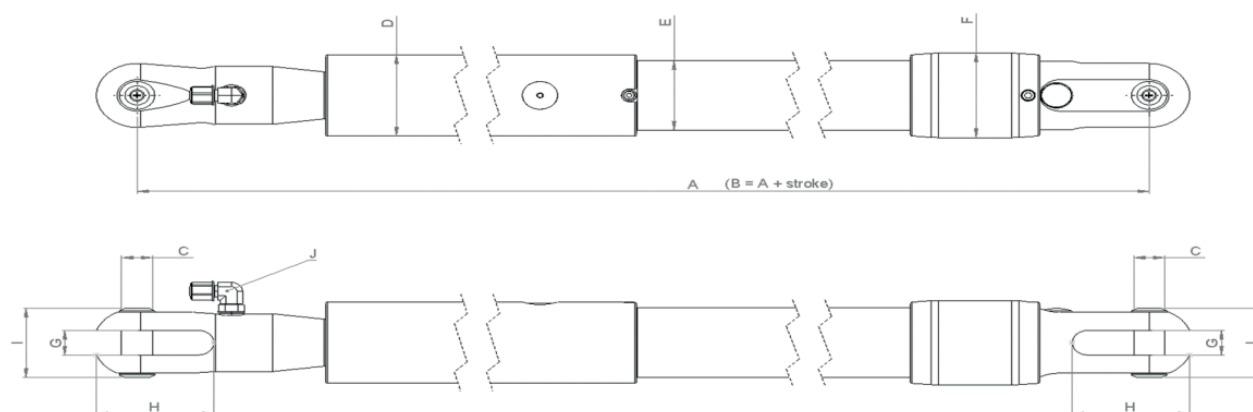

Model			HVG.II-17	HVG.II-22	HVG.II-30	HVG.II-40	HVG.II-60
article no.	black		63663	63661	63659	62322	63282
	silver		on request	on request	on request	on request	on request
	Position Indication (PI), black		63664	63662	63660	61965	63536
	Position Indication (PI), silver		on request	on request	on request	on request	on request
max. working pressure	[bar]	-	350	440	440	350	350
max. pulling force without gas compression	[t]	-	4,6	5,7	9,2	12,3	18,2
min. pushing force without gas compression	[t]	-	0,68	0,68	1,3	1,8	2,85
stroke	[mm]	-	275	275	300	300	350
PCLC* max.	[mm]	A	2800	2800	3000	3050	4450
PCLC* min.	[mm]	A	1200	1200	1280	1280	1710
pin Ø	[mm]	C	15,9	19,1	22	22	32
	[inch]	C	5/8	3/4	7/8	7/8	1 1/4
cylinder outside Ø	[mm]	D	64	64		105	127
extension outside Ø	[mm]	E	55	55		88	107
jaw spacer outside Ø	[mm]	F	66,5	66,5		98,5	118
piston rod Ø	[mm]		22	22	35	35	40
jaw width / clevis	[mm]	G	19,5	19,5		24	34
max. jaw depth / clevis	[mm]	H	73	73		95	123
max. clevis width	[mm]	I	54,5	54,5		68	84
weight PI-version	[mm]	-	8	8		20	36
hydraulic port male	[-]	J	7/16" UNF	7/16" UNF		7/16" UNF	7/16" UNF
service set article no.	[-]	-	63665	63665	63667	63669	63668

*Pin center length, closed